



LED Driver

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

REV.NO.	PAGE
02	1 /18

SPECIFICATION

Model : SI-EPF006640WW

CUSTOMER :	
CHECKED	APPROVED
20 . . .	20 . . .

SAMSUNG			
DRAWN	CHECKED		APPROVED
	SALES	QA	
20 . . .	20 . . .	20 . . .	20 . . .

SAMSUNG ELECTRONICS CO., LTD.
SAMSUNG #2, NONGSEO-DONG, GIHEUNG-GU,
YONGIN-CITY, GYEONGGI-DO, KOREA, 446-711

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	



LED Driver

REV.NO.	PAGE
02	2 /18

REVISION OF SPECIFICATION

SYMBOL	REV	REVISION	PAGE	DATE	TRACED	APPRO.
	02	Modify the item 10(packing Spec)		2014.07.23	SK.Chi	CH.Back
	01	modify the item 1.4,2.2,5.4,6.3,8,9		2014.06.30	SK.Chi	CH.Back
	00	The First Specification established.		2014.05.26	SK.Chi	CH.Back

SAMSUNG	SPECIFICATION No.	
	DATE OF ISSUE	2014. 07. 24
LED Driver		REV.NO.
		02
		PAGE
TABLE OF CONTENTS		
1. AC Input Characteristics	4page	
1.1. Input Voltage	4page	
1.2. Input Frequency	4page	
1.3. Input Current	4page	
1.4. Range Switching	4page	
1.5. Inrush Current	4page	
1.6. Power Factor	5page	
1.7. THD(Total Harmonic Distortion)	5page	
1.8. Power Saving	5page	
2. DC Output Characteristics	6page	
2.1. Output Voltage and Output Current	6page	
2.2. Turn-On Delay Time	7page	
2.3. Efficiency	7page	
2.4. Dimming	8page	
3. Protection Requirements	8page	
3.1. Short Circuit Protection	8page	
3.2. OVP Protection	8page	
4. Environmental (Temperature and Humidity)	9page	
4.1. Operating	9page	
4.2. Shipping / Storage	10page	
5. Isolation (High Potential Testing)	10page	
5.1. Dielectric Strength (HI-POT)	10page	
5.2. Insulation Resistance	11page	
5.3. Leakage current	12page	
5.4. Earth continuity(IEC61347)	12page	
6. Safety & Requirements	12page	
6.1. Safety	12page	
6.2. EMI	13page	
6.3. Surge	13page	
6.4. ESD(Electrostatic Discharges)	13page	
7. Reliability	14page	
8. Outline Dimensions:	15page	
9. Label Drawing:	16page	
10. Packing Specification	17page	
11. Appendix A	18page	

		SPECIFICATION No.														
DATE OF ISSUE		2014. 07. 24														
	LED Driver	REV.NO.	PAGE													
02	4 /18															
1. AC Input Characteristics																
1.1. Input Voltage																
<p>The PSU is capable of supplying full rated output power over the input range of 108 to 305VAC RMS. Its nominal voltages are 120 and 277VAC. The PSU is capable of start-up (power-on) at 108VAC and 47 Hz minimum</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #90EE90;"> <th style="padding: 2px;">Condition</th> <th style="padding: 2px;">Minimum</th> <th style="padding: 2px;">Maximum</th> <th style="padding: 2px;">Units</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">Nominal</td><td style="padding: 2px;">120</td><td style="padding: 2px;">277</td><td style="padding: 2px;">Vrms</td></tr> <tr> <td style="padding: 2px;">Variable</td><td style="padding: 2px;">108</td><td style="padding: 2px;">305</td><td style="padding: 2px;">Vrms</td></tr> </tbody> </table>					Condition	Minimum	Maximum	Units	Nominal	120	277	Vrms	Variable	108	305	Vrms
Condition	Minimum	Maximum	Units													
Nominal	120	277	Vrms													
Variable	108	305	Vrms													
1.2. Input Frequency																
<p>The PSU operates with an input frequency range of 47 – 63Hz.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #90EE90;"> <th style="padding: 2px;">Condition</th> <th style="padding: 2px;">Minimum</th> <th style="padding: 2px;">Maximum</th> <th style="padding: 2px;">Units</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">Nominal</td><td style="padding: 2px;">50</td><td style="padding: 2px;">60</td><td style="padding: 2px;">Hz</td></tr> <tr> <td style="padding: 2px;">Variable</td><td style="padding: 2px;">47</td><td style="padding: 2px;">63</td><td style="padding: 2px;">Hz</td></tr> </tbody> </table>					Condition	Minimum	Maximum	Units	Nominal	50	60	Hz	Variable	47	63	Hz
Condition	Minimum	Maximum	Units													
Nominal	50	60	Hz													
Variable	47	63	Hz													
1.3. Input Current																
<p>Maximum steady state input current is 0.18A (Max.) @120Vac.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #90EE90;"> <th style="padding: 2px;">Input Voltage</th> <th style="padding: 2px;">Maximum</th> <th style="padding: 2px;">Units</th> </tr> </thead> <tbody> <tr> <td style="padding: 2px;">120Vac/60Hz</td><td style="padding: 2px;">0.18A</td><td style="padding: 2px;">Amps(RMS)</td></tr> </tbody> </table>					Input Voltage	Maximum	Units	120Vac/60Hz	0.18A	Amps(RMS)						
Input Voltage	Maximum	Units														
120Vac/60Hz	0.18A	Amps(RMS)														
1.4. Range Switching																
<p>The PSU can accept 120Vac to 277Vac full input range. No range switching is necessary or possible.</p>																
1.5. Inrush Current																
<p>The cold or hot start inrush current should be less than 20A and not cause the fuse open or component damaged. (The Time duration at 50% of Ipeak is 350usec.)</p>																

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

	LED Driver	REV.NO.	PAGE
		02	5 /18

1.6. Power Factor

Power factor must higher than 0.9 @ 120-277Vac with the output current greater than 57% of rated current and the total output power higher than half load conditions.

Parameter	Symbol	Condition	Specifications			Units
			min.	typ.	max.	
Power Factor	PF	Vac= 120-277Vac Io= 0.275-0.5A, Vo=20-50V Po>7.5W	0.9	-	1.00	

1.7. THD (Total Harmonic Distortion)

THD must lower than 20% @ 120-277Vac with the output current greater than 55% of rated current and the total output power higher than half load conditions.

Parameter	Symbol	Condition	Specifications			Units
			min.	typ.	max.	
THD	TH	Vac= 120-277Vac Io= 0.275-0.5A, Vo=20-50V Po>7.5W	-	-	20	%

1.8. Power Saving

At stand-by mode, the power consumption should less than 1W. The stand-by mode is definition by the AD pin supplied from external DC voltage under 1V.

Parameter	Symbol	Condition	Specifications			Units
			min.	typ.	max.	
Power saving	--	Vac= 120-277Vac	--	--	1	Watts



LED Driver

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

REV.NO. PAGE

02 6 /18

2. DC Output Characteristics

2.1. Output Voltage and Output Current


The output current can be adjusted by the Rset resistor. This item is tested under LED mode of E-load and the Rd coefficient should setting at 0.21.

The output condition is as following curve. The tolerance of output voltage should be within $\pm 2\%$ of setting value and output current should be within $\pm 5\%$ of rated current.

The output current adjusted method is following below:

1. Disconnected Rset resistor to set full load at 30V/0.5A condition.
2. Connected the Rset resistor value to adjust the output current*. The Rset resistor connected to 3.9KOhm, the output is setting to full load at 50V/0.3A condition.
3. The PSU should has the minimum output current at 0.18A when the Rset resistor less than 1Kohm

* The Rset value is referring to Appendix A.

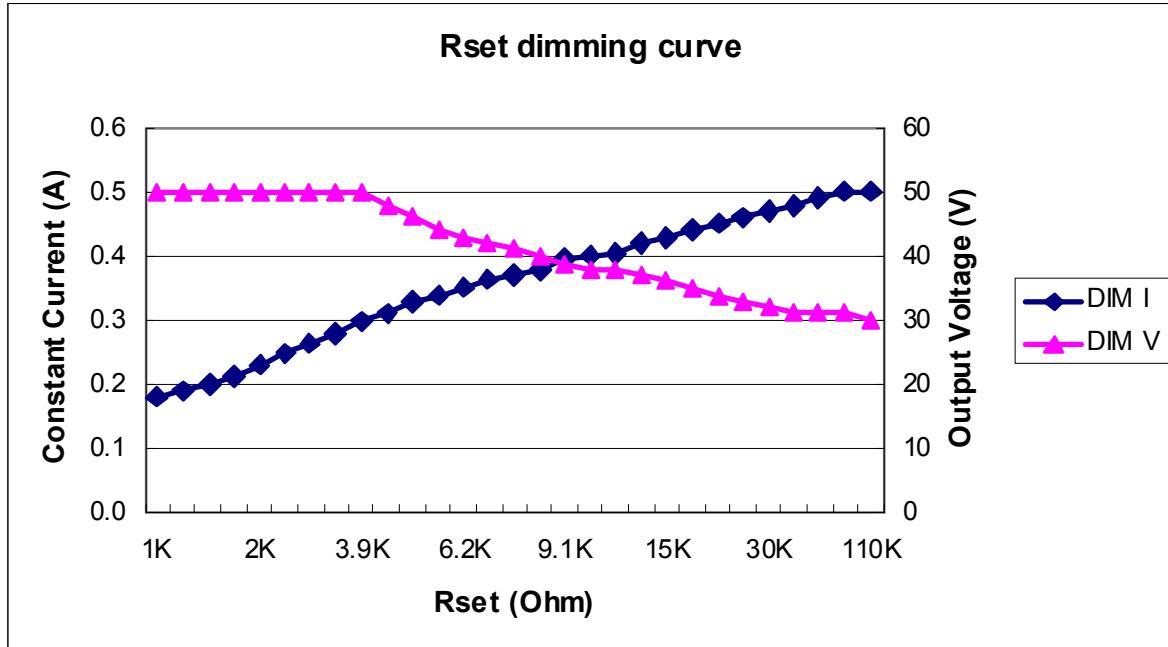

The output Voltage range is referring from following form :

Parameter	Condition	Minimum	Normal	Maximum	Units
Operating Voltage	$I_o = 0.18 \sim 0.5A$	20	--	50	Volts
Output Power	$I_o = 0.18 \sim 0.5A$ $V_o = 20\sim 50V$	3.6	--	15	Watts


SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	



LED Driver

REV.NO.	PAGE
02	7 /18

- * The output voltage is limited by max output power. When the output current is 0.5A, the maximum output voltage will be 30 volts. If the output current is setting to 0.3A by Rset resistor, the maximum output voltage will be up to 50 volts. The detail value is referring from Appendix A.
The output power coverage is referring from following:

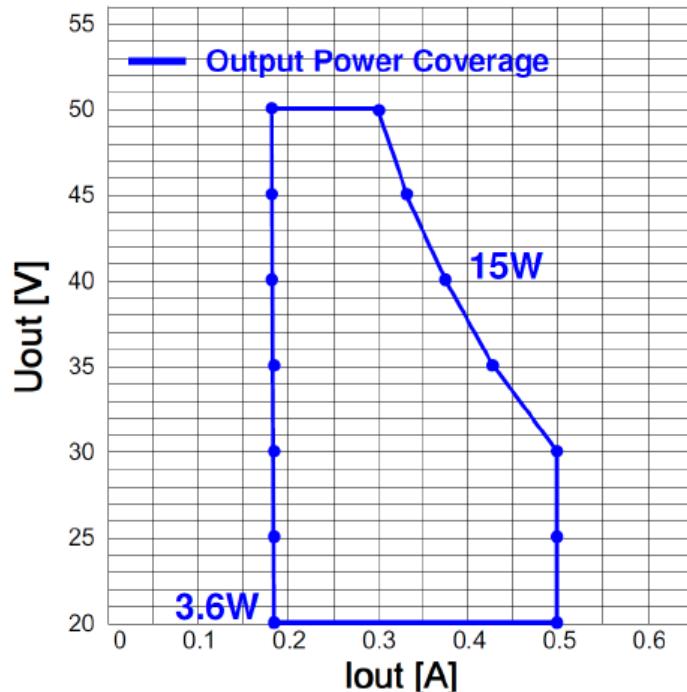

2.2. Turn-On Delay Time

DC output turn-on delay time should less than 1 second at 108Vac input and typical load condition.
(30V/0.5A)

The turn-on delay time is measured from “AC turn on” to “output reach 95% of rated current”.

2.3. Efficiency

The efficiency should greater than 83% at output condition 30V/0.5A and 50V/0.3A under 120V/60Hz and 277V/50Hz. (The PSU should warm up under full load condition at least 30 minutes).

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	




LED Driver

REV.NO.	PAGE
02	8 /18

2.4. Dimming

The PSU has AD dimming function. It must be used with DC 0~10V. Dimming Curve is as below:

(The current of LED module is $0.5A \pm 5\%$ at full load condition.)

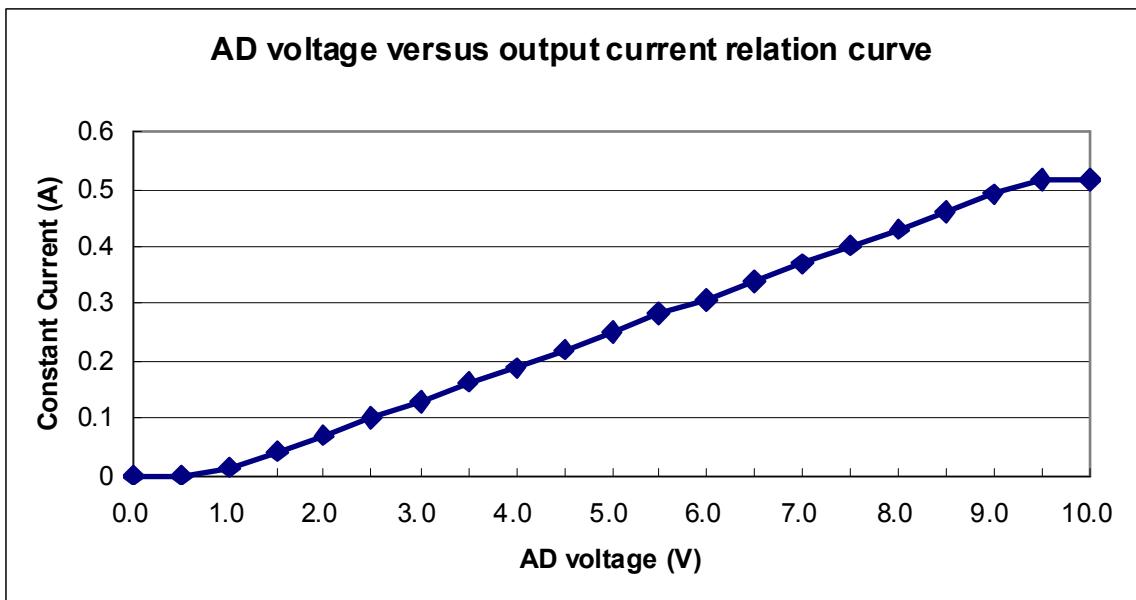

3. Protection Requirements

1.1. Short Circuit Protection

The PSU should be protected when the output short and do not result in a fire hazard, shock hazard, or damage to the PSU. The protection is auto-recovery mode. The test procedure is setup at LED mode and short V+ to GND, after the fault condition removed, the PSU should be auto-recovery and works normally.

1.2. OVP Protection

When No Load Condition occurs, the PSU should Clamp output voltage at the OVP Voltage and not to damage the PSU. The OVP Voltage can adjust by Rset. After the Load is switch on, the PSU should be works normally. The OVP Voltage can adjust by Rset. OVP Voltage is referring from following curve. The maximum OVP voltage should be under 56V


SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	



LED Driver

REV.NO. PAGE
02 9 /18

Output Name	Over Voltage Limit	Protection
Vo	< 56V	Auto-recovery

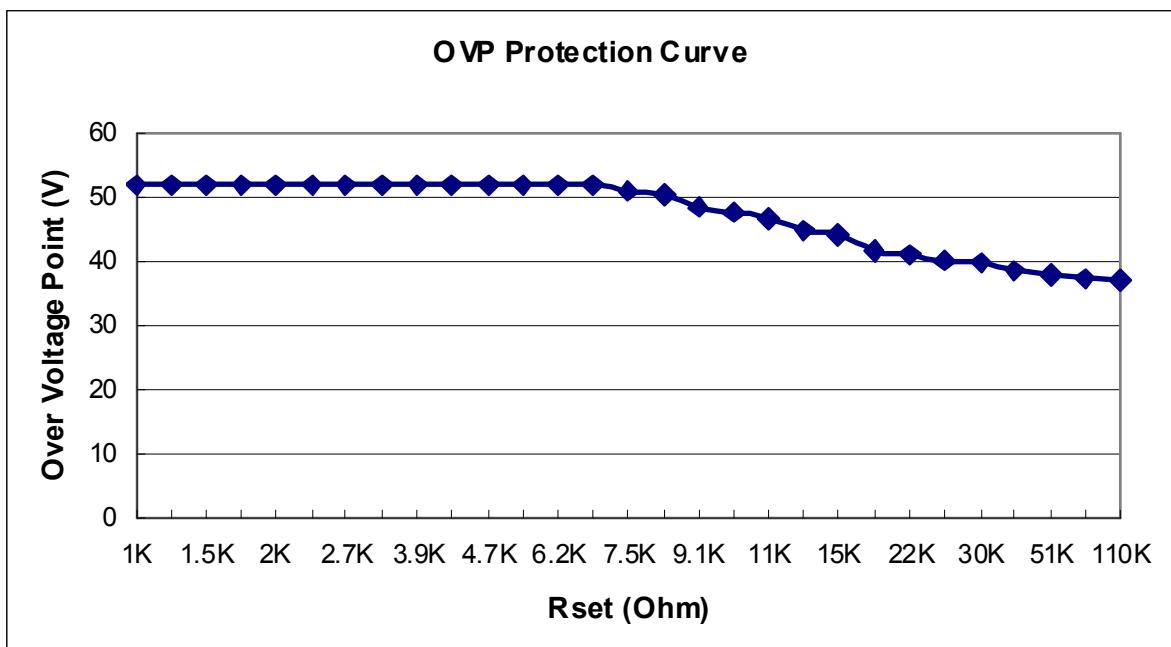

4. Environmental (Temperature and Humidity)

4.1. Operating

Temperature	The PSU shall operate from -20°C to 50°C.
Relative Humidity	10% to 90% relative humidity.
Altitude	2,000 feet above sea level or 10,000 feet above sea level with a 32°C maximum ambient air temperature.

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

	LED Driver	REV.NO.	PAGE
		02	10 /18

4.2. Shipping / Storage

Temperature	The PSU can be storage from ambient -25°C to 80°C.
RelativeHumidity	20% to 90% relative humidity.
Altitude	20,000 feet above sea level.

5. Isolation (High Potential Testing)

5.1. Dielectric Strength (HI-POT)

One hundred percent (100%) of PSU shall comply with the minimum production line Hi-Pot (High Potential) test as noted below. The test shall be applied between the L/N (AC Line and Neutral) to Output Terminal (Vout and RTN).

Parameters	Setting
Voltage	3750 Vac minimum
Trip Current Sensitivity	10 milli-amperes maximum
Voltage Ramp Time	500 V/Second ramp minimum
Dwell Time	60 seconds for safety apply, 3 seconds for mass production(4000 Vac)
Breakdown Arc Detection	10 microseconds maximum

One hundred percent (100%) of PSU shall comply with the minimum production line Hi-Pot (High Potential) test as noted below. The test shall be applied between the L/N (AC Line and Neutral) to PE (Chassis/Input receptacle ground terminal).



LED Driver

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

REV.NO.	PAGE
02	11 /18

Parameters	Setting
Voltage	1500 Vac minimum
Trip Current Sensitivity	10 milli-amperes maximum
Voltage Ramp Time	500 V/Second ramp minimum
Dwell Time	60 seconds for safety apply, 3 seconds for mass production(1800 Vac)
Breakdown Arc Detection	10 microseconds maximum

5.2. Insulation Resistance

One hundred percent (100%) of PSU shall comply with the minimum production line Insulation Resistance test as noted below.

The test shall be applied between the L/N (AC Line and Neutral) to Output Terminal (Vout and RTN).

Parameters	Setting
Voltage	500Vdc minimum
Dwell Time	60 seconds for safety apply, 3 seconds for mass production
Insulation Resistance	4 M ohms

One hundred percent (100%) of PSU shall comply with the minimum production line Insulation Resistance test as noted below. The test shall be applied between the L/N (AC Line and Neutral) to PE (Chassis/Input receptacle ground terminal).

Parameters	Setting
Voltage	500Vdc minimum
Dwell Time	60 seconds for safety apply, 3 seconds for mass production
Insulation Resistance	2 M ohms

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

	LED Driver	REV.NO.	PAGE
		02	12 /18

5.3. Leakage current

The maximum leakage current is 700uA at 277Vac 60Hz with resistive load.

(Please refer to IEC 60950).

Parameters	Setting
Input Voltage	277Vac/60Hz
Leakage Current	700 micro-amperes maximum

5.4 Earth continuity(IEC61347)

One hundred percent (100%) of PSU shall comply with the minimum production line Insulation Resistance test as noted below. The test shall be applied between the PE (Input receptacle ground terminal) to PE (Chassis).

Maximum resistance: 0.50Ω. Measured by passing a minimum current of 10 A with a no-load voltage not exceeding 12 V for at least 1 s

Parameters	Setting
Voltage	12V maximum
Current	10A minimum
Dwell Time	60 seconds for safety apply 3 seconds for mass production
Maximum Resistance	0.5 ohms

6. Safety & Requirements

6.1. Safety

The PSU should meet following requirements:

Standard	UL/cUL	UL60950 + UL8750
----------	--------	------------------

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

	LED Driver	REV.NO.	PAGE
		02	13 /18

6.2. EMI

The PSU should meet following requirements. The test voltage has tested under 120Vac/60Hz at full load. The margin limit is under 3dB.

Standard	FCC	FCC Part 15 Class B
-----------------	-----	---------------------

6.3 Surge

The PSU Should meet flookwing requirements :

Standard	IEC / EN	IEC/EN61547
-----------------	----------	-------------

Characteristics		Test Level		
		Equipment		
Test Level	Semi-luminaire	Independent driver		Input Power Level
		≤25W	>25W	
Waveform	-	-	-	1.2/50 μs
L-N	-	-	-	± 1 kV
L/N - GND	-	-	-	± 2 KV

Note: L-N Use Low impedance (2 ohm) five times for each phase.

Note: L/N - GND Use High impedance (12 ohm) five times for each phase

*The surge test level is follow the ">25W" defined by customer requirement

6.4. ESD(Electrostatic Discharges)

The PSU with lighting fixture should meet following requirements:

ESD can not be tested with PSU stand alone must test with lighting fixture.

Standard		Test Specification
ESD	IEC 61000-4-2	Contact Discharge ±4KV
		Air Discharge ±8KV

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	

	LED Driver	REV.NO.	PAGE
		02	14 /18

7. Reliability

Item	Descriptions	Specification
Electrolytic Capacitor Life	Input Vac :120~277Vac Ambient: 50°C Output Loading: 100% of full load	$\geq 50,000$ hours
CMTBF	Input Vac :120~277Vac Ambient: 25°C Output Loading: Full load	$\geq 100,000$ hours
Burn-in (MP stage)	AC 120V/60Hz 100% Burn-in with 100% load (ORT random test) AC 277V/60Hz 100% Burn-in with 100% load (100% MP stage) 35~45°C Environment temperature Burn-in 2 hours	No function error No damage


SPECIFICATION No.	
DATE OF ISSUE	2014. 07. 24





LED Driver

REV.NO.	PAGE
02	15 /18

8. Outline Dimensions: 123 * 79 * 33mm

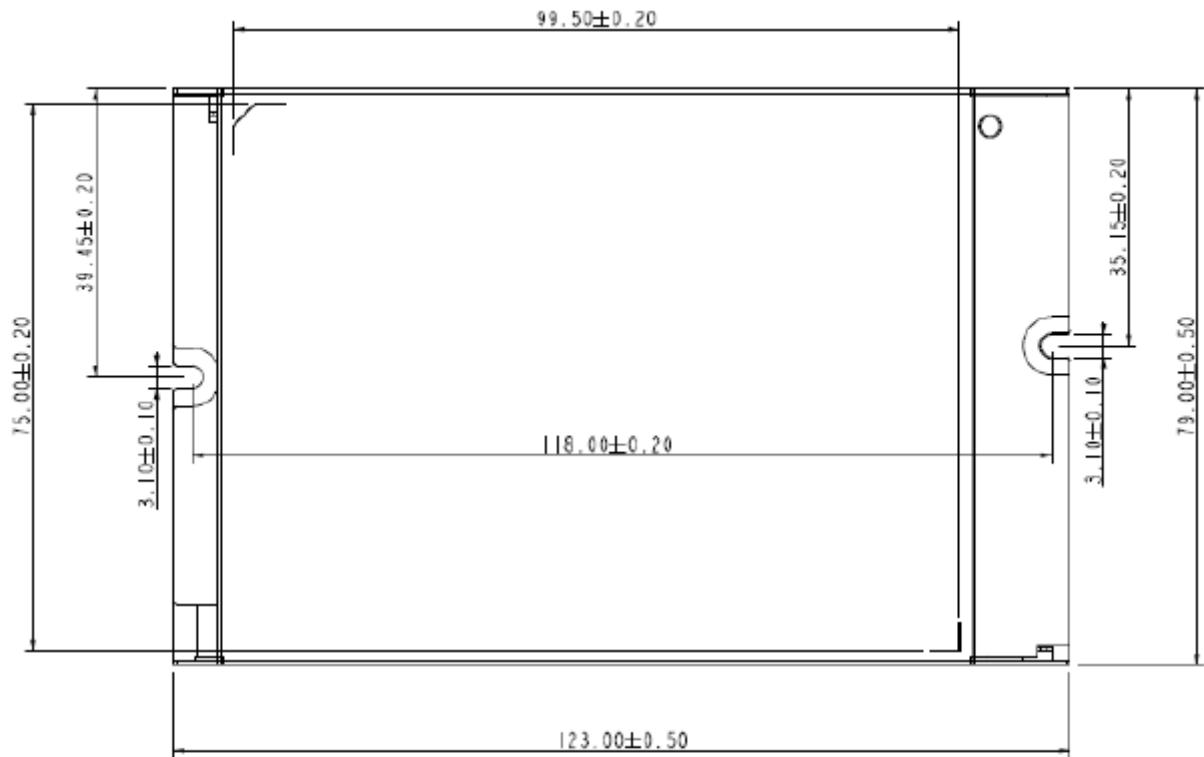

[TOP]

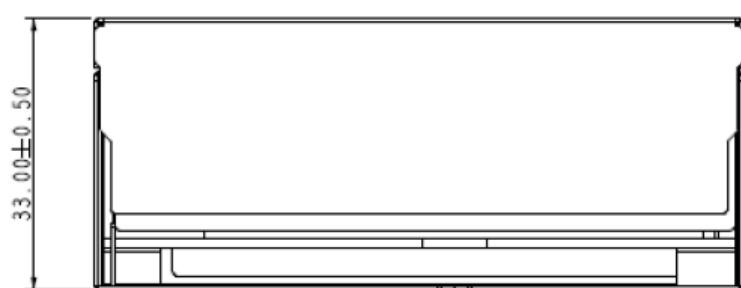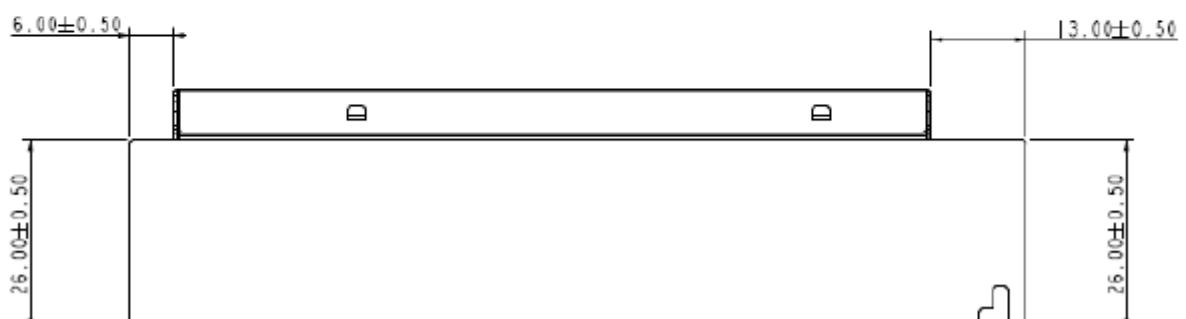

[Side]


SPECIFICATION No.	
DATE OF ISSUE	2014. 07. 24



LED Driver

REV.NO.	PAGE
02	16 /18

9. Label Drawing:

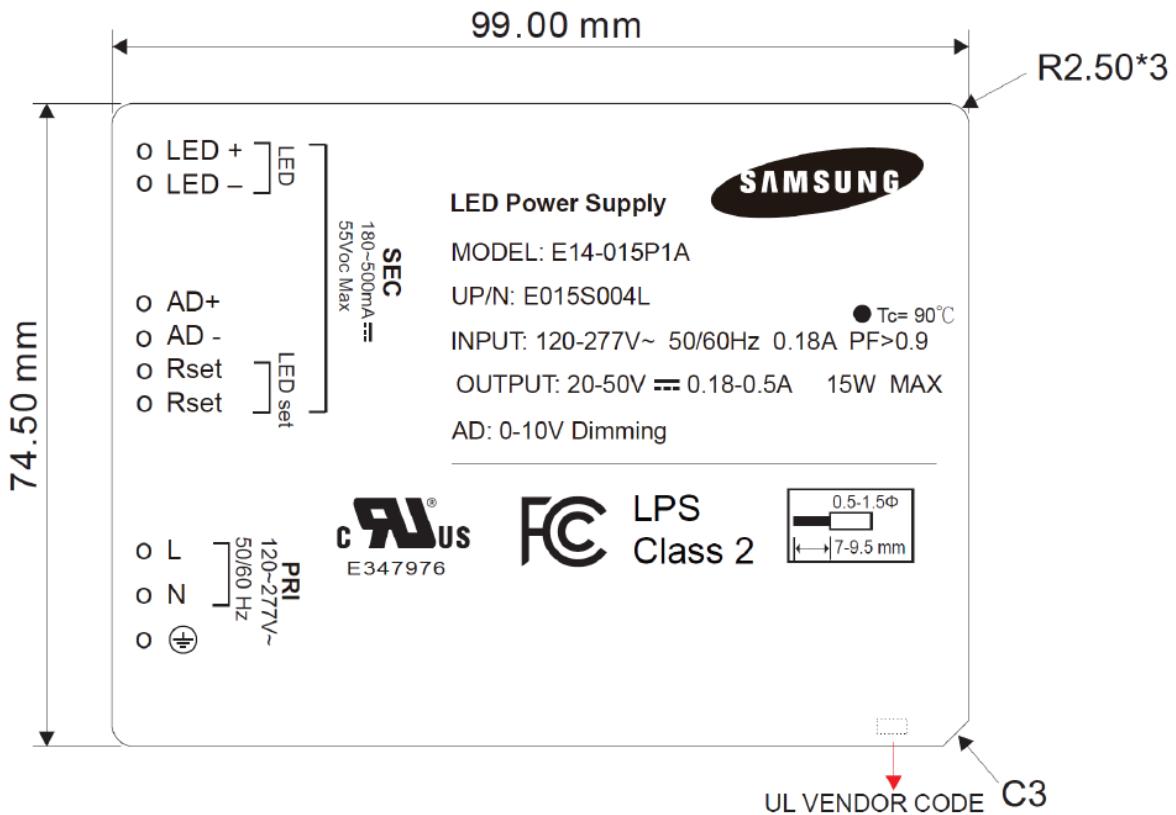

SPECIFICATION No.	
DATE OF ISSUE	2014. 07. 24




LED Driver


REV.NO.	PAGE
02	17 /18

10. Packing Specification:

10.1. Outbox : 483(L) * 385(W) * 108(H)

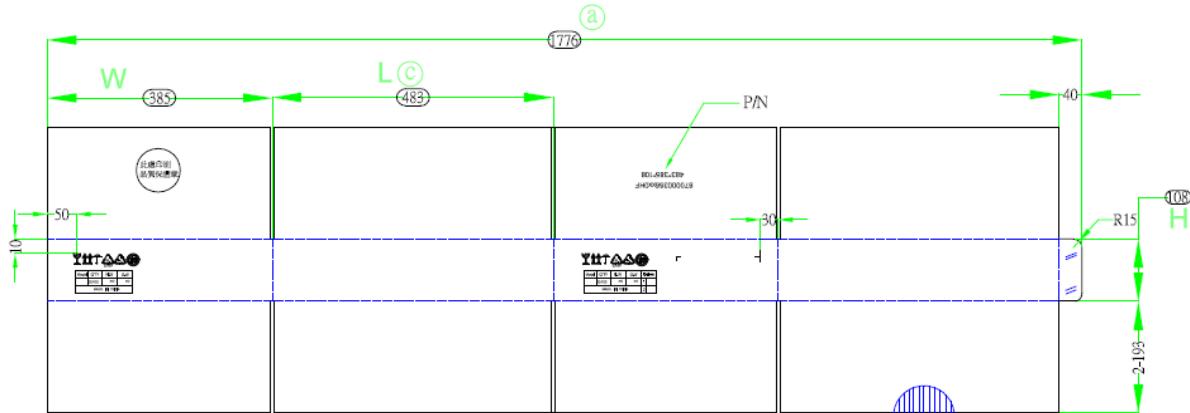

10.2. Stock pattern

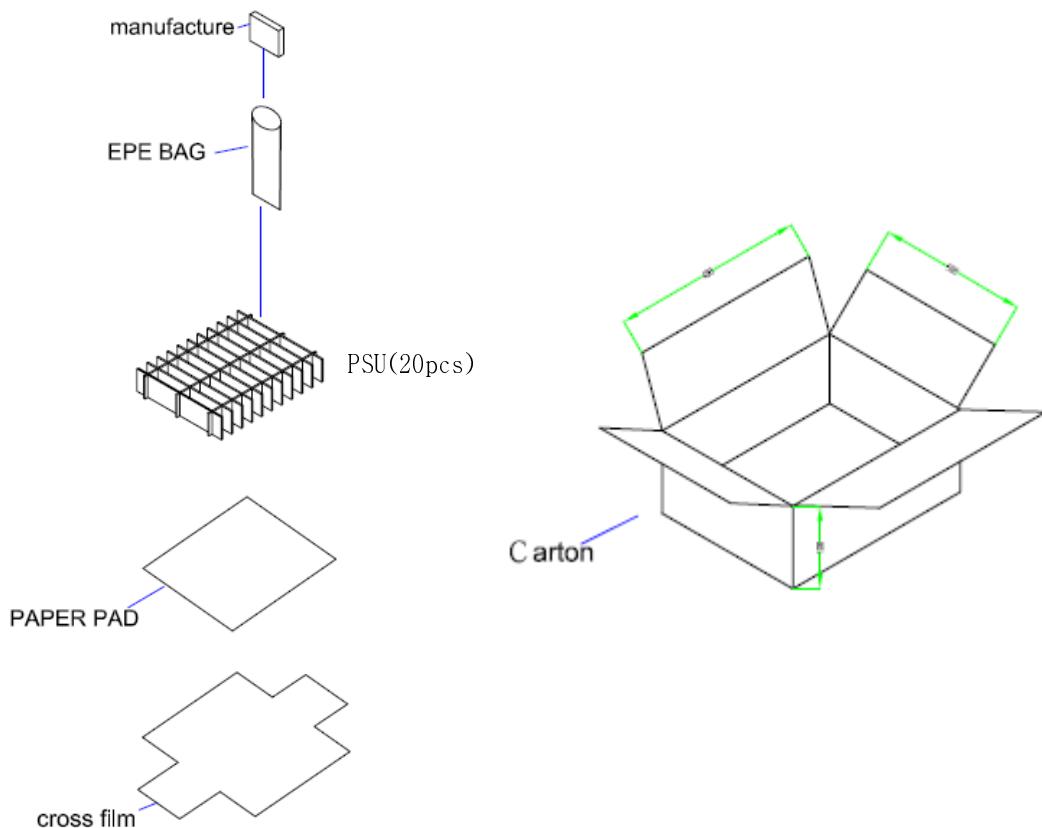

SPECIFICATION No.		
DATE OF ISSUE	2014. 07. 24	



LED Driver

REV.NO.	PAGE
02	18 /18

11. Appendix A

The Output Current and Output Voltage set-up Table is as below

Rset Dimming Function Test Data				
Rset Value	Output Current	Output Voltage	Max Operating Voltage	OVP Voltage
1K	0.1800A	20~50V	50V	52V
1.3K	0.1900A	20~50V	50V	52V
1.5K	0.2000A	20~50V	50V	52V
1.6K	0.2100A	20~50V	50V	52V
2K	0.2300A	20~50V	50V	52V
2.4K	0.2500A	20~50V	50V	52V
2.7K	0.2650A	20~50V	50V	52V
3.3K	0.2800A	20~50V	50V	52V
3.9K	0.3000A	20~50V	50V	52V
4.3K	0.3100A	20~48V	48V	52V
4.7K	0.3300A	20~46V	46V	52V
5.6K	0.3400A	20~44V	44V	52V
6.2K	0.3500A	20~43V	43V	52V
6.8K	0.3650A	20~42V	42V	52V
7.5K	0.3700A	20~41V	41V	51V
8.2K	0.3800A	20~40V	40V	50V
9.1K	0.3950A	20~39V	39V	49V
10K	0.4000A	20~38V	38V	48V
11K	0.4050A	20~37V	38V	47V
13K	0.4200A	20~37V	37V	45V
15K	0.4300A	20~36V	36V	44V
20K	0.4400A	20~35V	35V	42V
22K	0.4500A	20~34V	34V	41V
24K	0.4600A	20~33V	33V	40V
30K	0.4700A	20~32V	32V	40V
43K	0.4800A	20~31V	31V	39V
51K	0.4900A	20~31V	31V	38V
82K	0.5000A	20~31V	31V	37V
110K	0.5000A	20~30V	30V	37V