

### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



June 2016

# FAN8303 2 A 23 V Non-Synchronous Step-Down DC/DC Regulator

### **Features**

- 2 A Output Current
- 0.22 Ω Internal Power MOSFET Switch
- Wide 5 V to 23 V Operating Input Range
- Output Adjustable from 0.6 to 20 V
- Stable with Low ESR Output Ceramic Capacitors
- Up to 90% Efficiency
- Less than 40 µA Shutdown Current
- Fixed 370 kHz Frequency
- Thermal Shutdown with Hysteresis
- Cycle-by-Cycle Over-Current Protection
- Available in 8-Pin SOIC Package

## **Applications**

- Set-Top Box
- DSL and Cable Modems
- Distributed Power Systems
- Consumer Appliances (DVD)
- Auxiliary supplies

## **Description**

The FAN8303 is a monolithic, non-synchronous, stepdown (buck) regulator with internal power MOSFETs. It achieves 2 A continuous output current over a wide input supply range with excellent load and line regulation. Current-mode operation provides fast transient response and eases loop stabilization. Fault condition protection includes cycle-by-cycle current limiting and thermal shutdown. The regulator draws less than 40  $\mu A$  shutdown current. FAN8303 requires a minimum number of readily available standard external components.

External compensation, enable, and programmable soft-start features allow design optimization and flexibility. Cycle-by-cycle current limit, frequency foldback, and thermal shutdown provide protection against shorted outputs.




Figure 1. Typical Application

### **Ordering Information**

Part Number	Operating Temperature Range	Package	Packing Method
FAN8303MX	-40°C to +85°C	8-SOIC	Reel

For Fairchild's definition of "green" Eco Status, please visit: <a href="http://www.fairchildsemi.com/company/green/rohs\_green.html">http://www.fairchildsemi.com/company/green/rohs\_green.html</a>.

# **Internal Block Diagram**

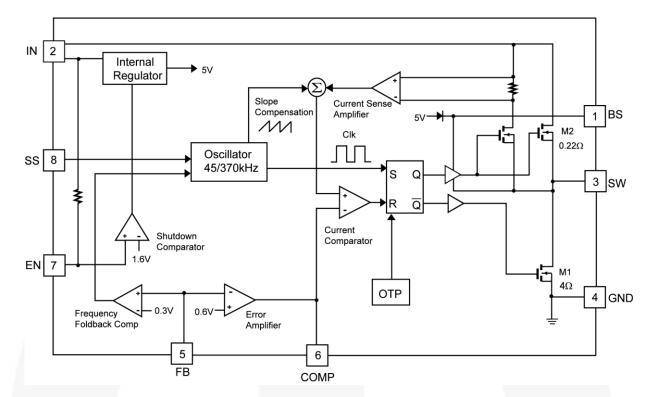


Figure 2. Functional Block Diagram

# **Pin Configuration**




Figure 3. Pin Configuration (Top View)

# **Pin Definitions**

Name	Pin#	Туре	Description
BS	1	Bootstrap	High-Side Drive BOOT Voltage. Connect through capacitor ( $C_{BS}$ ) to SW. The IC includes an internal synchronous bootstrap diode to recharge the capacitor on this pin to $V_{CC}$ when SW is LOW.
Vin	2	Supply Voltage	Power Input. This pin needs to be closely decoupled to the GND pin with a 10 $\mu F$ or greater ceramic capacitor.
SW	3	Switch	Power Switching Output. SW is the switching node that supplies power to the output.
GND	4	Ground	Power Return and Signal Ground for the IC. All internal control voltages are referred to this pin. Tie this pin to the ground island / plane through the lowest impedance connection. This pin is the ground reference for the regulated output voltage.
FB	5	Feedback	Feedback Input. This pin is the center tap of the external feedback voltage resistive divider across the output.
COMP	6	Compensation	Compensation Node. Frequency compensation is accomplished at this node by connecting a series R-C to ground.
EN	7	Enable	Enable Input. EN is a digital input that turns the regulator on or off. Drive EN HIGH to turn on the regulator, drive it LOW to turn it off. For automatic startup, leave EN unconnected.
SS	8	Soft Start	External Soft-Start. A capacitor connected between this pin and GND can be used to set soft-start time.

## **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. All voltage values, except differential voltages, are given with respect to the network ground terminal. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device

Symbol		Parameter	Min.	Max.	Unit
V <sub>IN</sub>	Supply Voltage, VIN to		25	V	
Vsw	Switch Voltage, SW to 0	GND	-0.3	V <sub>IN</sub> +0.3	V
V <sub>BS</sub>	Boost Voltage			V <sub>SW</sub> + 6	V
$V_{FB}$	Feedback Voltage		-0.3	6.0	V
V <sub>EN</sub>	Enable Voltage		-0.3	6.0	V
$V_{COMP}$	Compensation Voltage	-0.3	6.0	V	
$V_{SS}$	Soft-Start Voltage	-0.3	6.0	V	
ΘЈΑ	Thermal Resistance, Ju		105	°C/W	
Θ <sub>JC</sub>	Thermal Resistance, Ju	nction-Case		40	°C/W
$T_J$	Operating Junction Temperature			+125	°C
TL	Lead Temperature (Soldering, 5 Seconds)			+260	°C
T <sub>STG</sub>	Storage Temperature R	-65	+150	°C	
ESD	Electrostatic Discharge	Human Body Model, JEDEC JESD22-A114	3.0		kV
LSD	Protection Level Charged Device Model, JEDEC JESD22-C1		2.5		ΝV

# **Recommended Operating Conditions**


The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min	Max.	Unit
V <sub>IN</sub>	Supply Voltage	5	23	V
T <sub>A</sub>	Operating Ambient Temperature	-40	+85	°C

### **Electrical Characteristics**


 $V_{IN}$ =12 V,  $T_A$ = -40 to +85°C, unless otherwise noted.

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
V <sub>FB</sub>	Feedback Voltage	25°C, 5V <v<sub>IN&lt;23 V</v<sub>	0.58	0.60	0.62	V
R <sub>ON_H</sub>	Upper Switch On Resistance			0.22		Ω
R <sub>ON_L</sub>	Lower Switch On Resistance			4		Ω
I <sub>LKG</sub>	Upper Switch Leakage Current	V <sub>EN</sub> =0 V,V <sub>SW</sub> =0 V		0	10	μΑ
I <sub>PK</sub>	Peak Inductor Current			3.5		Α
fosc	Oscillator Frequency	V <sub>FB</sub> >0.3 V	315	370	435	kHz
V <sub>UVLO</sub>	Under-Voltage Lockout	Rising V <sub>IN</sub>	4.2	4.6	5.0	V
f <sub>SHORT</sub>	Short Circuit Frequency	V <sub>FB</sub> <0.3 V	25	45	55	kHz
D <sub>MAX</sub>	Maximum Duty Cycle		/	90		%
T <sub>ON_MIN</sub>	Minimum On Time			210		ns
V <sub>EN</sub>	Enable Threshold		1.2	1.6	2.0	V
V <sub>EN_H</sub>	Enable Threshold Hysteresis			150		mV
I <sub>OFF</sub>	Supply Current (Shutdown)	V <sub>EN</sub> =0 V		10	40	μA
IQ	Supply Current (Quiescent)	V <sub>EN</sub> >1.6 V; V <sub>FB</sub> =0.8 V		1.0	2.0	mA
G <sub>CS</sub>	Current Sense Gain			2		A/V
G <sub>EA</sub>	Error Amplifier Transconductance			380		μA/V
A <sub>VEA</sub>	Error Amplifier Voltage Gain			400		V/V
I <sub>SS</sub>	Soft-Start Current			6		μA
TSD	Thermal Shutdown Temperature			155		°C

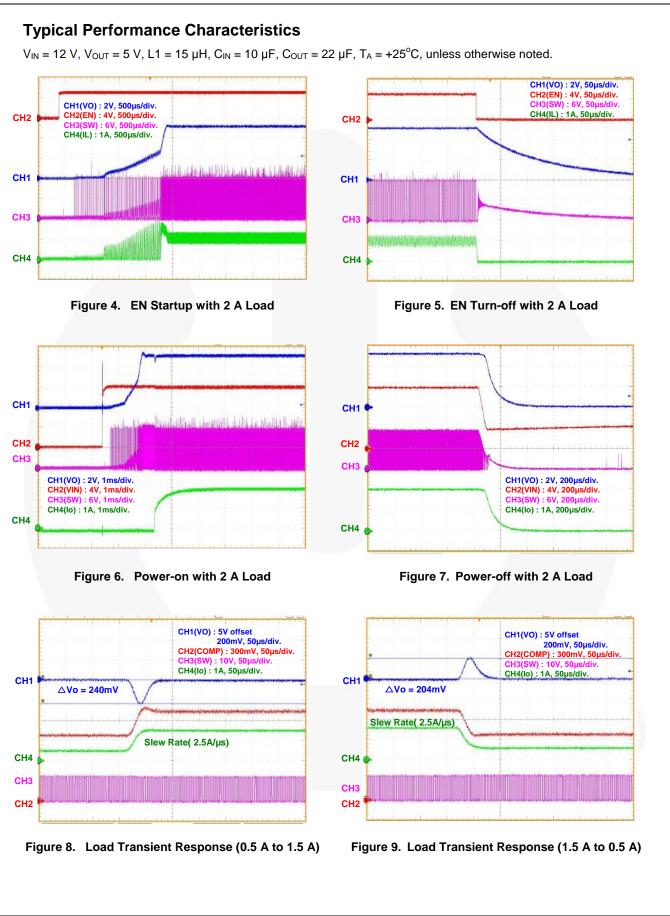

# Typical Performance Characteristics (Continued)

 $V_{IN}$  = 12 V,  $V_{OUT}$  = 5 V, L1 = 15  $\mu$ H,  $C_{IN}$  = 10  $\mu$ F,  $C_{OUT}$  = 22  $\mu$ F,  $T_A$  = +25°C, unless otherwise noted.







Figure 10. Hard-Short at Output (OCP)

Figure 11. Overload at Output (OCP)







Figure 12. Efficiency Curve

Figure 13. Normalized Output Voltage vs. Temperature






Figure 14. Oscillator Frequency vs. Temperature

Figure 15. Current Limited Level vs. Duty Ratio

### **Functional Description**

The FAN8303 is a monolithic, non-synchronous, current-mode, step-down regulator with internal power MOSFETs. It achieves 2 A continuous output current over a wide input supply range from 5 V to 23 V with excellent load and line regulation. The output voltage can be regulated as low as 0.6 V. The FAN8303 uses current-mode operation that provides fast transient response and eases loop stabilization. The FAN8303 requires a minimum number of readily available standard external components.

### **Current Mode PWM Control Loop**

FAN8303 uses current-mode PWM control scheme. The peak inductor current is modulated in each switching cycle by an internal op-amp output signal to achieve the output voltage regulation. An internal slope compensation circuit is included to avoid sub-harmonic oscillation at duty cycle greater than 50%. Current-mode control provides cycle-by-cycle current limit protection and superior regulation control loop response compared to the traditional voltage-mode control.

In normal operation, the high-side MOSFET is turned on at the beginning of each switching cycle, which causes the current in the inductor to build up. The current-control loop senses the inductor current by sensing the voltage across the high-side senseFET during on time. The output of the current-sense amplifier is summed with the slope compensation signal and the combined signal is compared with the error amplifier output to generate the PWM signal. As the inductor current ramps up to the controlled value, the high-side MOSFET is turned off and the inductor current reaches zero through a freewheeling diode. In light-load condition, the high-side switch may be kept off for several cycles to improve efficiency.

#### **Short-Circuit Protection**

The FAN8303 protects output short circuit by switching frequency fold-back. The oscillator frequency is reduced to about 45 kHz when the output is shorted to ground. This frequency fold-back allows the inductor current more time to decay to prevent potential run-away condition. The oscillator frequency switches to 370 kHz as  $V_{\text{OUT}}$  rises gradually from 0V back to regulated level.

# Slope Compensation and Inductor Peak Current

The slope compensation provides stability in constant frequency architecture by preventing sub-harmonic oscillations at high duty cycles. It is accomplished internally by adding a compensating ramp to the inductor current signal at duty cycles in excess of 50%.

### Maximum Load Current at Low VIN

The FAN8303 is able to operate with input supply voltage as low as 5 V, although the maximum allowable output current is reduced as a function of duty cycle (see Figure 15). Additionally, at this low input voltage; if the duty cycle is greater than 50%, slope compensation reduces allowable output current.

### **Inductor Selection**

A higher inductor value lowers ripple current. The inductor value can be calculated as:

$$L = \frac{V_{OUT}}{f_{S} \cdot \Delta I_{L}} \left( 1 - \frac{V_{OUT}}{V_{IN}} \right)$$
 (1)

where:

fs is the switching frequency;

V<sub>OUT</sub> is the output voltage;

V<sub>IN</sub> is the input supply voltage; and

 $\Delta I_L$  Is the inductor ripple current.

Considering worst case, the equation is changed to:

$$L = \frac{V_{OUT}}{f_{S} \cdot \Delta I_{L,MAX}} \left( 1 - \frac{V_{OUT}}{V_{IN,MAX}} \right)$$
 (2)

### **Input Capacitor Selection**

To prevent high-frequency switching current passing to the input, the input capacitor impedance at the switching frequency must be less than input source impedance. High-value, small, inexpensive, lower-ESR ceramic capacitors are recommended. 10 µF ceramic capacitors should be adequate for 2 A applications.

### **Output Capacitor Selection**

A larger output capacitor value keeps the output ripple voltage smaller. The formula of output ripple  $\Delta V_{OUT}$  is:

$$\Delta V_{OUT} \cong \Delta I_L \left( ESR + \frac{1}{8 \cdot C_{OUT} \cdot f_S} \right)$$
 (3)

where  $C_{\text{OUT}}$  is the output capacitor and ESR is the equivalent series resistance of the output capacitor.

#### **Output Voltage Programming**

The output voltage is set by a resistor divider, according to the following equation:

$$V_{OUT} = 0.6 \left( 1 + \frac{R2}{R3} \right) \tag{4}$$

### Freewheeling Diode

An output freewheeling diode carries load current when the high-side switch is turned off. Therefore, use a Schottky diode to reduce loss due to diode forward voltage and recovery time. The diode should have at least 2 A current rating and a reverse blocking voltage greater than the maximum input voltage. The diode should be close to the SW node to keep traces short and reduce ringing.

#### **Soft-Start**

A capacitor,  $C_{SS}$ , connected between the SS pin and GND helps control the rate of rise on the output voltage. When EN is HIGH and  $V_{IN}$  is within the operating range, a trimmed bias current charges the capacitor connected to the SS pin, causing the voltage to rise.

The time it takes this voltage to reach 0.6 V and the PWM output to reach regulation is given by:

$$t_{RISE}(m_{\rm S}) \approx 0.1 \bullet C_{\rm SS} \tag{5}$$

where CSS is in nF.

### **Loop Compensation**

The goal of the compensation design is to shape the converter frequency response to achieve high DC gain and fast transient, while maintaining loop stability. FAN8303 employs peak current-mode control for fast transient response and to help simplify the loop to a one-pole and one-zero system.

The system pole is calculated by the equation:

$$f_{P1} = \frac{1}{2\pi \cdot C_{OUT} \cdot R_L} \tag{6}$$

where R<sub>L</sub> is the load resistor value (V<sub>OUT</sub>/I<sub>OUT</sub>).

The system zero is due to the output capacitor and its ESR system zero is calculated by following equation:

$$f_{Z1} = \frac{1}{2\pi \cdot C_{OUT} \cdot ESR} \tag{7}$$

The characteristics of the control system are controlled by a series capacitor and resistor network connected to the COMP pin to set the pole and zero.

The pole is calculated by the following equation:

$$f_{p2} = \frac{G_{EA}}{2\pi \cdot C_C \cdot A_{VEA}} \tag{8}$$

where:

G<sub>EA</sub> is the error amplifier transconductance (380 µA/V);

A<sub>VEA</sub> is the error amplifier voltage gain (400 V/V); and

C<sub>C</sub> is the compensation capacitor.

Zero is due to the compensation capacitor ( $C_C$ ) and resistor ( $R_C$ ) calculated by the following equation:

$$f_{z2} = \frac{1}{2\pi \cdot C_C \cdot R_C} \tag{9}$$

where R<sub>C</sub> is compensation resistor.

The system crossover frequency ( $f_C$ ), where the control loop has unity gain, is recommended for setting the 1/10th of switching frequency. Generally, higher  $f_C$  means faster response to load transients, but can result in instability if not properly compensated.

The first step of the compensation design is choosing the compensation resistor ( $R_{\text{C}}$ ) to set the crossover frequency by the following equation:

$$R_{\rm C} = \frac{2\pi \cdot C_{\rm OUT} \cdot f_{\rm C} \cdot V_{\rm OUT}}{G_{\rm CS} \cdot G_{\rm FA} \cdot V_{\rm FB}} \tag{10}$$

where  $V_{FB}$  is reference voltage and  $G_{CS}$  is the current sense gain, which is roughly the output current divided by the voltage at COMP (2 A/V).

The next step is choosing the compensation capacitor  $(C_C)$  to achieve the desired phase margin. For applications with typical inductor values, setting the compensation zero,  $f_{ZZ}$ , to below one fourth of the crossover frequency provides sufficient phase margin. Determine the  $(C_C)$  value by the following equation:

$$C_C = \frac{2}{\pi \cdot R_C \cdot f_C} \tag{11}$$

Determine if the second compensation capacitor  $(C_A)$  is required. It is required if the ESR zero of the output capacitor is located at less than half of the switching frequency.

$$\frac{1}{2\pi \cdot C_{OUT} \cdot ESR} < \frac{f_S}{2} \tag{12}$$

If required, add the second compensation capacitor  $(C_A)$  to set the pole  $f_{P3}$  at the location of the ESR zero. Determine the  $(C_A)$  value by the equation:

$$C_A = \frac{C_{OUT} \cdot ESR}{R_C} \tag{13}$$




Figure 16. Block Diagram of Compensation

### Design example

Assume the  $V_{\text{IN}}$  voltage is 12 V with a 10% tolerance. The maximum load current is 2 A and the output voltage is set to 2.5 V at 2 A maximum load. Calculate the inductor value from the following formula:

$$L = \frac{V_{OUT}}{f_{OSC} \cdot \Delta I_{L,MAX}} \left( 1 - \frac{V_{OUT}}{V_{IN,MAX}} \right)$$
 (14)

Substituting V<sub>OUT</sub>=2.5 V, V<sub>IN,MAX</sub>=12 V,  $\Delta$  I<sub>L,MAX</sub>=0.4 A, and f<sub>S</sub> = 370 kHz in the formula gives:

$$L = \frac{2.5}{370 \text{kHz}(0.4\text{A})} \left( 1 - \frac{2.5}{12} \right) = 13 \mu\text{H}$$
 (15)

A 15 µH inductor is chosen for this application.

If the  $V_{OUT}$  voltage is 2.5 V, choose R2=18k $\Omega(1\%)$ , and R3 can be calculated from:

$$R3 = 18k\Omega \left(\frac{0.6}{2.5 - 0.6}\right) = 5.68k\Omega \tag{16}$$

Choose R3=5.6  $k\Omega(1\%)$ .

In this application, with the desired crossover frequency at 30 kHz,  $R_{\text{C}}$  value is calculated as follows:

$$R_C = \frac{2\pi \cdot 22\mu F \cdot 30kHz \cdot 2.5V}{2A/V \cdot 380\mu A/V \cdot 0.6V}$$
(17)

If  $R_C$ =22.72 k $\Omega$ , choose 22 k $\Omega$  for the design.

If  $R_C=22 k\Omega$ , use the following equation to get  $C_C$ :

$$C_{\rm C} = \frac{2}{\pi \cdot 22k\Omega \cdot 30kHz} \tag{18}$$

C<sub>C</sub>= 0.965 nF, choose 1 nF for the design.

# Table 1. Recommended Compensation Values $(V_{IN}=12 \text{ V})$

Vo	L	Соит	R <sub>2</sub>	R <sub>3</sub>	Rc	Cc	
1.8 V	10 µH	22 µF	22 µF		9 kΩ	16 kΩ	1.5 nF
2.5 V	15 µH			18 kΩ	5.6 kΩ	22 kΩ	1 nF
3.3 V	15 µH	MLCC	10 K12	4 kΩ	27 kΩ	820 pF	
5 V	22 µH			2.45 kΩ	43 kΩ	560 pF	

### **Layout Consideration**

As with all switching power supplies, careful attention to PCB layout is important to the design. A few design rules should be implemented to ensure good layout:

- Keep the high-current traces and load connections as short as possible.
- Place the input capacitor, the inductor, the freewheeling diode, and the output capacitor as close as possible to the IC terminals.
- Keep the loop area between the SW node, freewheeling diode, inductor, and output capacitor as small as possible. Minimizing ground loops reduces EMI issues.
- Route high-dV/dt signals, such as SW node, away from the error amplifier input/output pins. Keep components connected to these pins close to the pins.
- To effectively remove heat from the MOSFETs, use wide land areas with appropriate thermal vias.




Figure 17. Recommended PCB Layout

The table below pertains to Marketing outline drawing on the following page.

### **Package Dimensions**

Symbol		Millimeter	Millimeter		Inch	
	Min.	Тур.	Max.	Min.	Тур.	Max.
Α	1.346		1.752	0.053		0.069
A1	0.101		0.254	0.004		0.010
b		0.406			0.016	
С		0.203			0.008	
D	4.648		4.978	0.183		0.196
E	3.810		3.987	0.150		0.157
е		1.270			0.050	
F		0.381X45°			0.015X45°	
Н	5.791		6.197	0.228		0.244
L	0.406		1.270	0.016		0.050
θ°	0°		8°	0°		8°



ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative